


Professional 101 Liquid Grease

Synthetic low-viscosity grease without PTFE. Suitable for all moving, metallic parts. Corrosion protection for iron and non-ferrous metals. Very good fluidity and short flash-off time. Temperature stability from -40 °C to +150 °C.

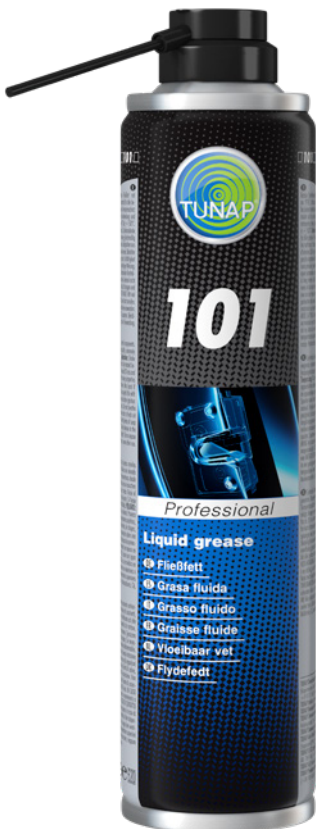

Properties

- ✓ Extremely free flowing
- ✓ Reduces friction and wear
- ✓ Very good corrosion protection
- ✓ Contains a UV component
- ✓ Resistant to cold and hot water
- ✓ Thermally stable from -40°C to +150°C
- ✓ No resin or adhesive effect
- ✓

Application area

- ✓ Long-term lubrication for all metallic parts under medium to heavy loads
- ✓ Wherever an oil spray is not long-lasting enough
- ✓ For joints, hinges, sliding parts, bolts, strikers, slide rails, levers, linkages
- ✓ At every inspection and maintenance

Instructions

Shake the can well until you can hear the balls inside. Pre-clean the surfaces to be treated if necessary. From a distance of approx. 20 cm, spray an even coating and leave the product to flash off. Repeat the treatment if necessary. Spraying the product from a short distance enhances the flow effect.

Product Description	Contents	Article Number	Packaging Unit
Liquid Grease	400 ml	1101048	12 PCS

Product Information



Technical Product Data

Liquid Grease

Density

0.7 g/cm³



The information herein is the product of careful testing. It is to be considered a recommendation compliant with state of the art knowledge where use is concerned. We cannot accept any liability whatsoever in view of the multiplicity of possible uses and working methods. No contractual relationship is hence implied and no ancillary obligations arise from any contract of sale that may be made. Product information is only valid in its latest current form. TUNAP (U.K) Limited | Unit L4 Deacon Trading Estate, Morley Road, Tonbridge, Kent TN9 1RA | Telephone +44 (0) 1732 365163 | e-Mail: sales@tunap.co.uk

PI 101 20260427

TUNAP.com