


microflex® 957 Engine Interior Cleaner

TÜV-approved, solvent-free cleaner based on a high-quality, low-viscosity oil with high-performance cleaning agents. The cleaner protects the new engine oil against contamination from used oil residues.

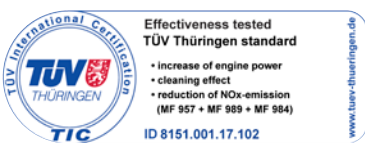

Properties

- ✓ Free of volatile organic compounds (VOCs)
- ✓ Contains low-viscosity detergents to deliver outstanding cleaning results
- ✓ Removes oil sludge deposits from the engine oil system
- ✓ Protects the engine from being damaged as a result of blocked oil channels and bore holes
- ✓ Contains additives to lubricate components during the cleaning process
- ✓ Does not contain any chlorine, phosphates, nitrates or heavy metals
- ✓ Can be disposed of with the used oil

Application area

- ✓ In case of oil sludge deposits
- ✓ In case of a loss of compression from the piston rings
- ✓ In the case of hydraulic valve lifters knocking
- ✓ When changing oil to ensure that the new engine oil is not contaminated by any residues of used oil

Instructions

Add cleaner to the engine oil prior to every oil change. Adhere to the minimum oil level. Allow the engine to run at idle speed for a maximum of 20 minutes with the vehicle at a standstill. Then change the oil and filter immediately afterwards.

Dosing

- 200 ml: Sufficient for up to 4 litres of engine oil.
- 400 ml: Sufficient for up to 6 litres of engine oil.
- 950 ml: Sufficient for up to 15 litres of engine oil.

Notice

- ✓ Caution! Risk of engine damage in higher dilutions.
- ✓ Not suitable for use in motorcycles with wet clutches.

Product Description	Contents	Article Number	Packaging Unit
Engine Interior Cleaner	200 ml	1102516	24 PCS

